




PRODUCT FEATURES

- Die-Cast Aluminum Alloy Housing
- Black Finish
- IP65 Rating - Suitable for Wet Locations
- 100-277 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Mercury and UV Free
- Dimming: 1-10V, PWM, VR
- Flat Clear Glass Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- DLC Premium Listed
- UL / cUL Certified
- Operating Temperature: -22°F to 122°F (-30°C to 50°C)



PRODUCT SPECIFICATIONS

| MODEL | ITEM # | POWER (W) | LUMENS (LM) | CCT (K) | DIMENSIONS (IN) D x H | EFFICIENCY (Lm/W) | BEAM ANGLE |
|--------------------|----------------|-----------|-------------|---------|--------------------------|-------------------|------------|
| CLU11-150WRD1-BK50 | L150W5KUFOCL11 | 150 | 20,250 | 5000 | Ø 11.73 x 7.44 | 135 | 110° |

DIAGRAM

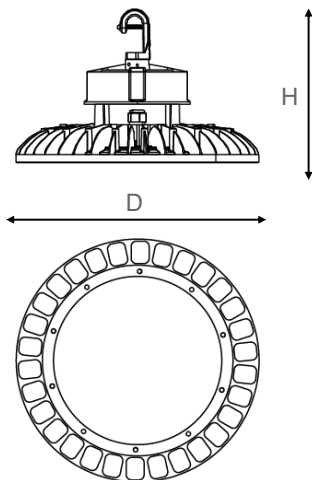

PHOTOMETRY

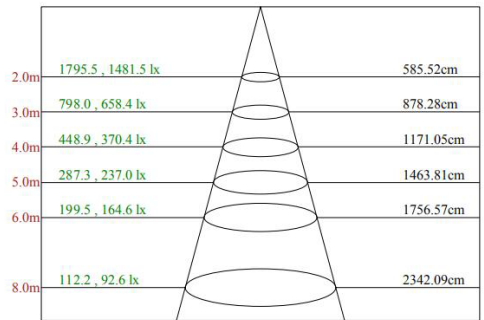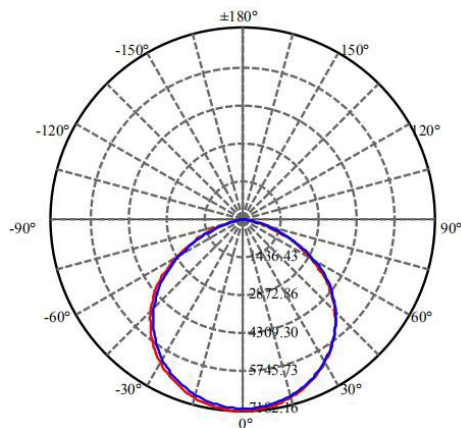

Max , Ave Beam angle of C0plane1 11.32

