




PRODUCT FEATURES

- Die-Cast Aluminum Alloy Housing
- Black Finish
- IP65 Rating - Suitable for Wet Locations
- 100-277 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Mercury and UV Free
- Dimming: 1-10V, PWM, VR
- Flat Clear Glass Lens
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- DLC Premium Listed
- UL / cUL Certified
- Operating Temperature: -22°F to 122°F (-30°C to 50°C)


PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) D x H	EFFICIENCY (Lm/W)	BEAM ANGLE
CLU11-240WRD1-BK50	L240W5KUFOCL11	240	32,400	5000	Ø 14.17 x 8.98	135	110°

DIAGRAM

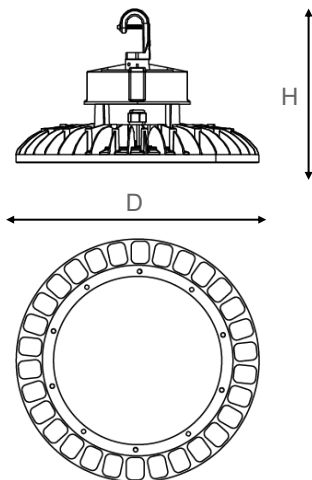

PHOTOMETRY

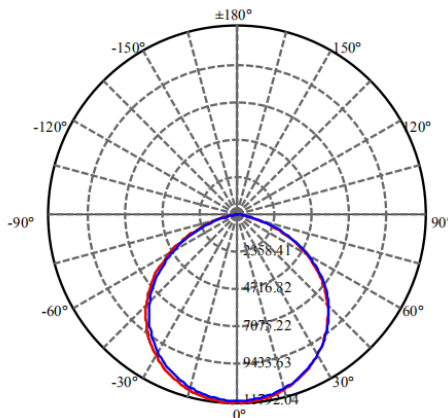

Height (m)	Max, Ave (lx)	Beam diameter (cm)
2.0m	2948.0 , 2426.8 lx	589.08cm
3.0m	1310.2 , 1078.6 lx	883.62cm
4.0m	737.0 , 606.7 lx	1178.16cm
5.0m	471.7 , 388.3 lx	1472.70cm
6.0m	327.6 , 269.6 lx	1767.24cm
8.0m	184.3 , 151.7 lx	2356.32cm

Max , Ave Beam angle of C180plane111.64

