



KT-WLED33-4-8XX-VDIM-P

LED WRAP FIXTURE

DESCRIPTION

LED wrap fixture

APPLICATION

Used for commercial, retail, and residential wrap applications



PRODUCT FEATURES

- Powered by Keystone 0-10V dimming LED drivers
- Standard prismatic style lens
- 0-10V dimming, 10% minimum
- Compatible with Keystone SmartSafe emergency LED drivers; KT-EMRG-LED-5-500 /A, KT-EMRG-LED-5-500 /NB, KT-EMRG-LED-12-1200 /A, or KT-EMRG-LED-12-1200 /NB are optimal for fixture level installation
- Compatible with Keystone 480-277V step down transformers
- Compatible with Keystone occupancy sensors
- Ambient operating temperature: -20°C/-4°F to 50°C/122°F
- UL Listed 1598: Suitable for dry and damp locations
- THD: <20%
- Power factor > 0.95
- L70 >50,000 hours

PERFORMANCE SPECIFICATIONS


| Catalog Number | Color Temperature | Nominal Length | Input Voltage | Wattage | CRI | Lumen Output | Efficacy |
|------------------------|-------------------|----------------|---------------|---------|-----|--------------|----------|
| KT-WLED33-4-835-VDIM-P | 3500K | 4' | 120-277V | 33W | 80 | 4,220 | 128 lm/W |
| KT-WLED33-4-840-VDIM-P | 4000K | 4' | 120-277V | 33W | 80 | 4,257 | 129 lm/W |
| KT-WLED33-4-850-VDIM-P | 5000K | 4' | 120-277V | 33W | 80 | 4,290 | 130 lm/W |



KT-WLED33-4-8XX-VDIM-P

LED WRAP FIXTURE

PHYSICAL SPECIFICATIONS

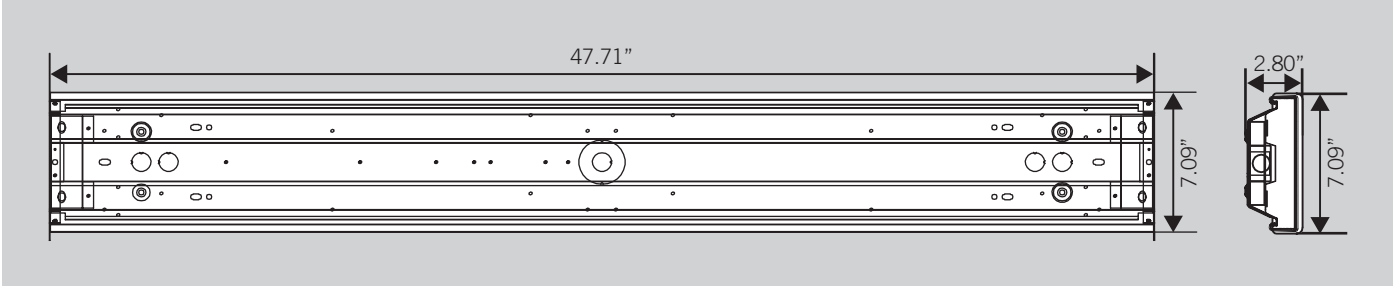

ORDERING INFORMATION

| Order Code | Packaging Style | Pack Quantity | Item Status |
|------------------------|-----------------|---------------|-------------|
| KT-WLED33-4-835-VDIM-P | Carton Pack | 1 | Active |
| KT-WLED33-4-840-VDIM-P | Carton Pack | 1 | Active |
| KT-WLED33-4-850-VDIM-P | Carton Pack | 1 | Active |

ACCESSORIES (SOLD SEPARATELY)

| Accessory | Catalog Number | Description |
|------------------------------------|-------------------------|--|
| SmartSafe Emergency Battery Backup | KT-EMRG-LED-5-500 /A | 5W, 500 lumen SmartSafe emergency battery backup |
| | KT-EMRG-LED-5-500 /NB | 5W, 500 lumen SmartSafe emergency battery backup with narrow battery |
| | KT-EMRG-LED-12-1200 /A | 12W, 1200 lumen SmartSafe emergency battery backup |
| | KT-EMRG-LED-12-1200 /NB | 12W, 1200 lumen SmartSafe emergency battery backup with narrow battery |

CATALOG NUMBER BREAKDOWN

KT-WLED33-4-8XX-VDIM-P

1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 LED Wrap Fixture
- 3 Wattage
- 4 4' Nominal Length
- 5 800 Series
- 6 Color Temperature
- 7 0-10V Dimming
- 8 Premium Series