



BUOY HIGH BAY LAMP

PID: SL915HBR



APPLICATIONS:

- HIGH BAY REPLACEMENT
- OTHER TYPICAL HID FIXTURES.

SPECIFICATIONS:

FEATURES

- Triple overheating protection
- Direct line voltage
- Min starting temperature -40°F (-40°C)
- Max starting temperature 113°F (45°C)

ENERGY DATA

- Internal driver: 100-277V
- Power factor > 0.90
- THD < 20%
- 4KVA surge protection

LED MODULES

- Samsung LED chips
- Available Kelvin temperature of 40K and 50K
- Beam angle: 120°
- CRI > 80
- 50,000 hour rated life

MOUNTING

- EX39 or E39 base

CERTIFICATIONS

- DLC standard certified
- UL certified
- IP64 rated

WARRANTY

- 5 year warranty

PRODUCT DETAILS


Product	Input	Base	Lumens ^{1,2}	Efficacy	Amps	CCT ¹	Replacement
120W	100-277V	E39	14,035	117	1440	50K	400W HID
150W	100-277V	E39	17,929	119	1800	50K	600W HID

1. CCT range complies to ANSI C78.377-2008

2. Rated average life based on engineering testing and probability analysis


3. Lifetime test consistent with IESNA LM80 lumen maintenance procedure

LM79 REPORT *LM Report is based on results for 150W Buoy Lamp

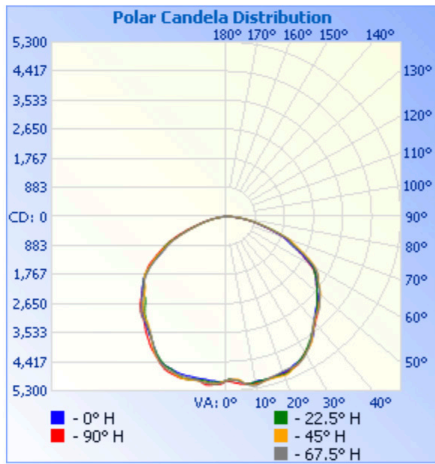

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	4,165.3	25.9%
0-40	6,875.9	42.7%
0-60	12,588.7	78.2%
60-90	3,473.8	21.6%
70-100	1,331.6	8.3%
90-120	10.7	0.1%
0-90	16,062.6	99.8%
90-180	28.8	0.2%
0-180	16,091.3	100%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	483.7	3.0%	90-100	4.6	0%
10-20	1,433.0	8.9%	100-110	2.9	0%
20-30	2,248.6	14.0%	110-120	3.2	0%
30-40	2,710.7	16.8%	120-130	4.1	0%
40-50	2,897.0	18.0%	130-140	4.5	0%
50-60	2,815.8	17.5%	140-150	4.0	0%
60-70	2,146.9	13.3%	150-160	3.1	0%
70-80	1,086.8	6.8%	160-170	1.8	0%
80-90	240.1	1.5%	170-180	0.6	0%

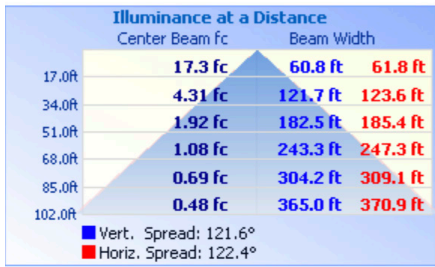


BOX DIMENSIONS

Product	Length (Inches)	Width (Inches)	Height (Inches)
120W	10.8	10.8	11
150W	10.8	10.8	11

PRODUCT DIMENSIONS

Product	Diameter (Inches)	Height (Inches)
120W	9	9
150W	9	9



ORDERING GUIDE

ORDER CODE	WATTS	VOLTS	CCT	BASE/MOUNT
SL915HBR	120W 150W	SU = 100-277V	50K = 5000K	E39

ORDER EXAMPLE: SL915HBR - 150W - SU - 50K - E39

The Straits Lighting Company is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, The Straits Lighting Company cannot accept any liability arising from the reliance on such data to the extent permitted.