

物料名称: MBL01-Bollard Light安装说明书(常规)
 物料编码: G-UM-BL0000001
 规格尺寸: 210X297mm
 材料工艺: 80G书纸

CR# (图号)	ISSUE (图次)	ZONE (区域)	REVISIONS (修改内容)	DATE (日期)	APP. (审核)	DATE (日期)
----------	------------	-----------	------------------	-----------	-----------	-----------

BOLLARDS

Installation Guide


WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION


- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -40°C to 45°C and to be horizontally mounted with the LEDs facing down.
- This product must be installed in accordance with the applicable installation code by a Person familiar with the construction and operation of the product and the hazards involved.
- In 75°C supply conductors.
- This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.
- The allowable ambient temperature is 10°C (50°F) to 40°C (104°F) when configuring the emergency battery kit.

Installation instructions

- Place the Bollard base over Anchor Bolts.
- Loosely tighten the washers and nuts provided. Tighten all nuts and screws.
- Be sure supply leads extend far enough to make fixture connections. Wiring connections can be made now.
- Slide the bollard over on bollard base lined up with the grooves. Be sure to check the LED position on the Bollard.
- Use the four set screws to secure the bollard to the bollard base.

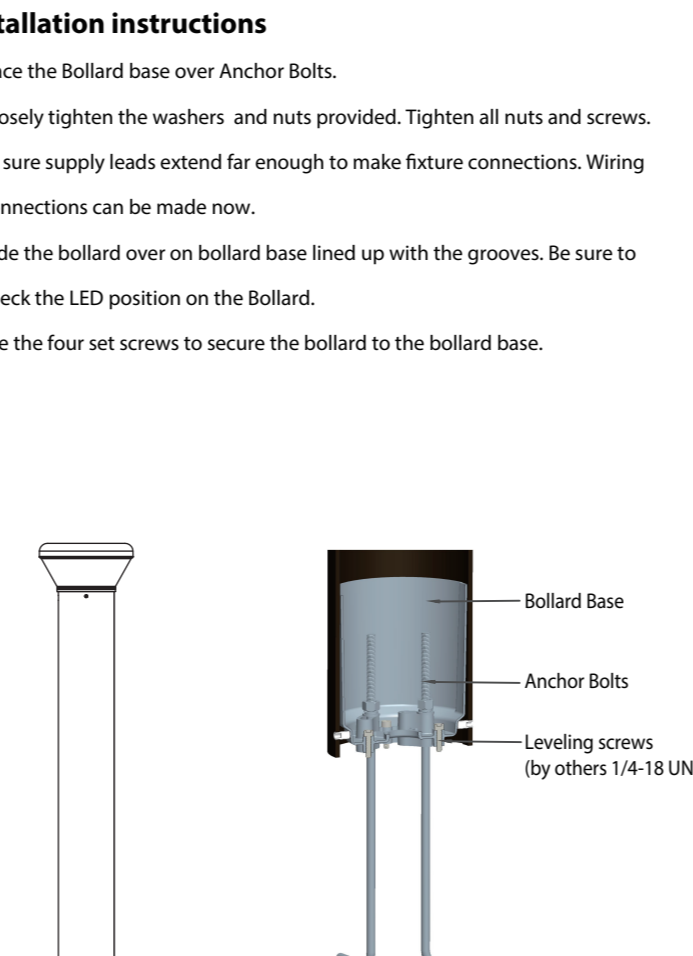

ROUND BOLLARD

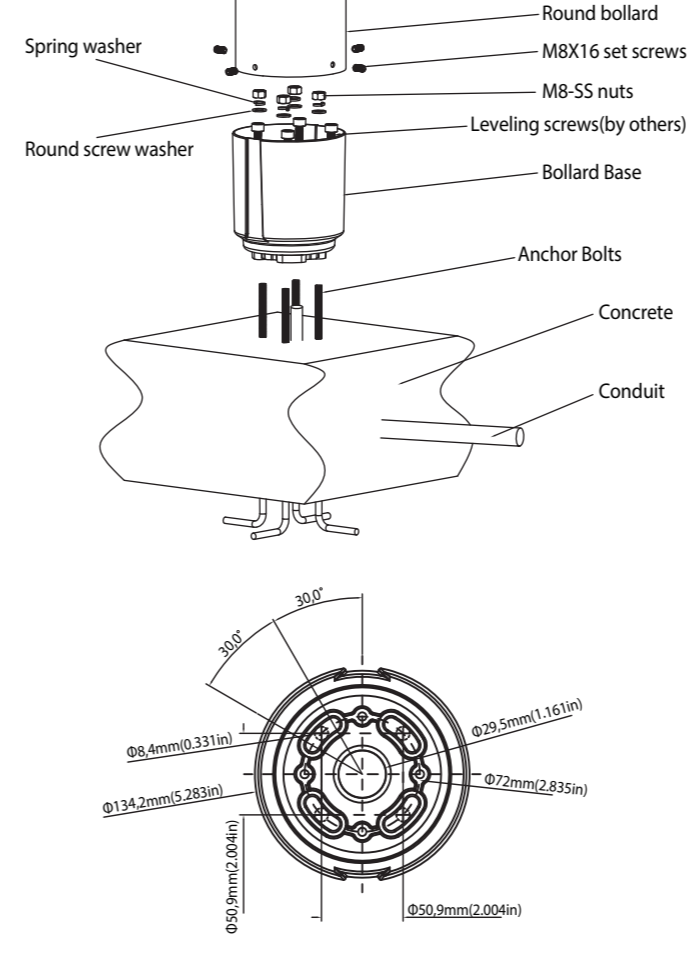

ANCHOR BOLT TEMPLATE FOR BLEED BOLLARD

Mounting Type	Accessory	Specifications	Quantity
	Bollard Base	MBL0124DZ-D134H143(D)-YZ	1
	MB-SS nuts	M8-SS	4
	Anchor Bolts	MBL0124ZJ-L314W/8H67	4
	Spring Washer	M8-SS	4
	Round Screw Washer	M8-OD15ID8.5H1.4-SS	4

Wire Connection

Black	Line
White	Neutral
Green/Yellow	Ground
Purple	Line
Gray	Neutral
	Ground

Emergency Wire Connection

Red	Line
White	Neutral
Green/Yellow	Ground
Black	Control Switch

Note: Two dimming wires are in the driver box.

设计: 苏仲清 审核: 质量: 标准化: 批准:

 深圳美斯特光电技术有限公司 MESTER LED LIMITED CO.,LTD		(料号): G-UM-BL0000001
单位: MM	SCALE (比例):	MATERIAL 材料:
THIRD ANGLE PROJECTION 第三角投影		(品名):
		(图号): GUMBL0000001-4001DS
LINEAR - .X ±0.10 - .XX ±0.05 ANGULAR - ±1/2°	DRAW (繪圖): DATE(日期): 2019/05/10	(图档路径):
	共 1 页	版本:A1
	第 1 页	图纸:A4