

LED Round Canopy

POWER & CCT SELECTABLE



Contractor-Friendly Canopy

The Topaz Round Canopy is a durable and attractive LED lighting solution for safety and functionality of covered outdoor spaces. Designed with contractor-friendly features, the removable mounting plate ensures a simple and secure installation, while the wattage and CCT selectable switches allow for on-site illumination adjustments. The domed lens is ideal for parking garages where uniformity throughout rows of multiple fixtures is key.

FEATURES

- Choose from three wattages and three CCT choices for up to nine possible configurations
- Removable mounting plate allows for secure, hassle-free installation
- Low-profile designs provides more clearance than traditional canopy fixtures
- Available in bronze and white finishes
- Ceiling or pendant mount options

APPLICATIONS

- Residential and commercial
- Exterior canopies
- Parking garages
- Stairwells
- Carports





Job Name/Title: _____ Catalog Number _____

Contractor: _____ Notes: _____

LED Round Canopy POWER & CCT SELECTABLE

GENERAL SPECIFICATIONS

Input Voltage, Frequency: 120-277V, 50/60Hz Power Factor, THD %: >0.9, <25% Dimmable: 0-10V down to 10% ¹ Efficacy: Up to 146 LPW Minimum CRI: 82	Beam Angle: 90° IES Distribution: Type V BUG Rating: B3-U3-G2 Functional Life (L70): 50,000 hours Location Rating: Wet	IP Rating: IP65 Ambient Operating Temperature: -40°F to 104°F Housing Construction: Aluminum Lens Type: Polycarbonate Mounting Options: Ceiling or pendant mount
---	---	---

ITEM SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	Lumens	Wattage	Input Current @120V/277V	CCT	Finish/Color	DLC Premium ID*
CPR-60WPCTS-BZ	72768	751338039971	4,388	30W	0.26/0.12A	3000K	Bronze	P6A5595I
			5,741	40W	0.35/0.16A	4000K		
			8,329	60W	0.53/0.24A	5000K		
CPR-60WPCTS-WH	72769	751338039988	4,388	30W	0.26/0.12A	3000K	White	P6A5595I
			5,741	40W	0.35/0.16A	4000K		
			8,329	60W	0.53/0.24A	5000K		

NOMENCLATURE

Example: **CPR-60WPCTS-BZ**

CPR = Canopy Round - **60W** = 30W/40W/60W **P** = Power Select **CTS** = Color Temperature Select 3000K|4000K|5000K - **BZ** = Bronze
WH = White



ENERGY SAVINGS

Catalog Number	LED Wattage	HID Replacement Wattage	Watts Saved	Yearly Savings	5 Year Savings
Based on 12 hours/day and \$0.11/kWh					
CPR-60WPCTS-xx	30W	150W	120W	\$58	\$289
	40W	175W	135W	\$65	\$325
	60W	250W	190W	\$92	\$458

DIMENSIONS / WEIGHTS

Catalog Number	(A)	(B)	Mounting Plate Dimensions	KO Information	Weight
CPR-60WPCTS-xx	11.85"	4.11"	6.85" x 6.14" x 0.37"	(3) 1/2" NPT threaded hubs	5.3 Lbs.

TYPICAL MOUNTING HEIGHTS

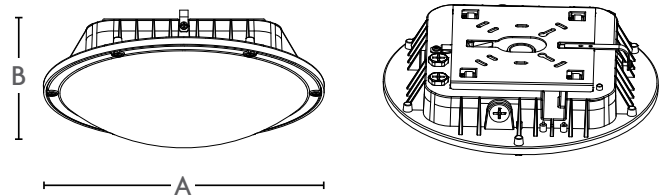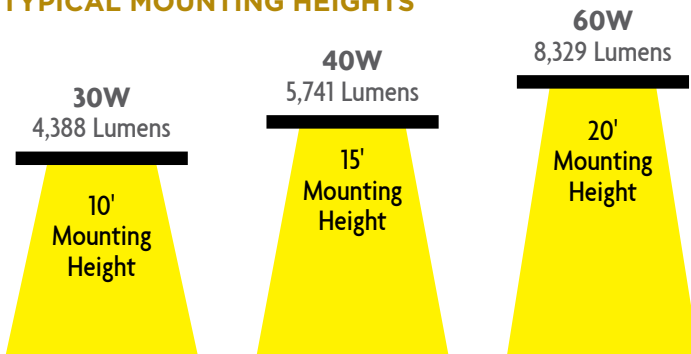

NOTES:

*DLC Primary Use Designation: Outdoor Parking Garage Luminaires

¹Dimming with standard 0-10V control system or wall dimmers. Dimming complies with IEC60929 Annex E. Fixture may not be compatible with all dimmers. Dimming performance may vary based on selected dimmer. Visit www.topaz-usa.com/led-dimmer-compatibility for up-to-date dimmer compatibility information.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specifications subject to change without prior notice. Replacement wattage shown depends on application and fixture.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

November 2021




Job Name/Title: _____ Catalog Number _____
 Contractor: _____ Notes: _____

LED Round Canopy
POWER & CCT SELECTABLE

PHOTOMETRICS

CPR-60WPCTS

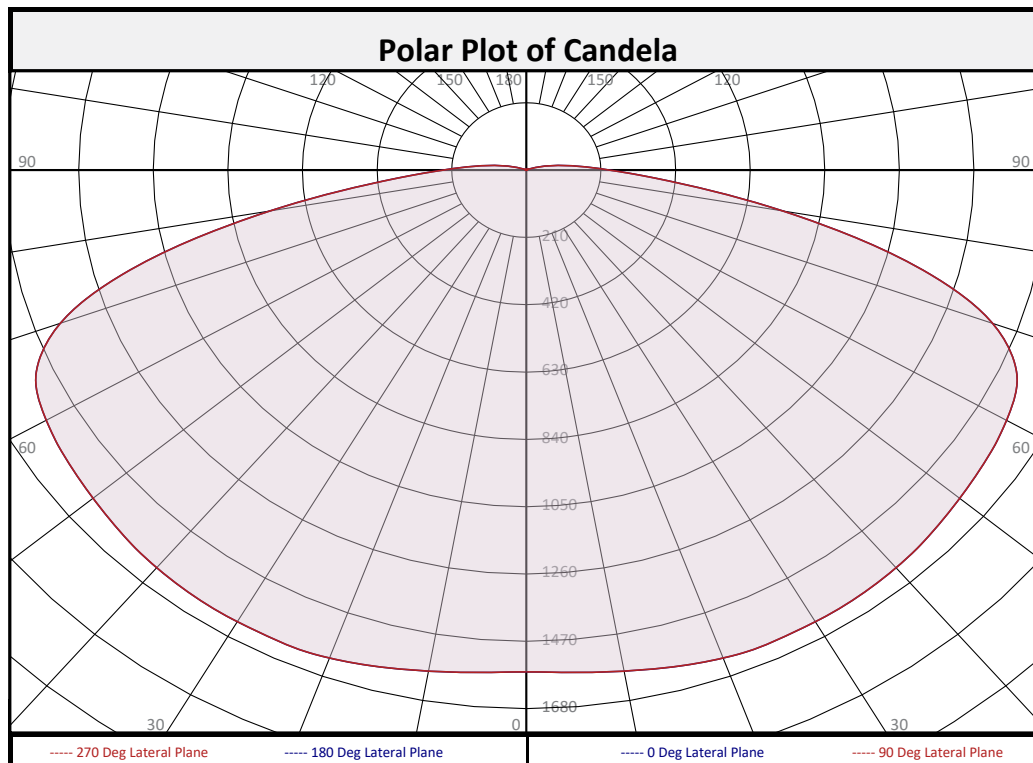

Zonal Flux Summary								
Zone (Deg Vert)	Flux (Lumens)	Percent of Total	Zone (Deg Vert)	Flux (Lumens)	Percent of Total	Zone (Deg Vert)	Flux (Lumens)	Percent of Total
0-10	150.7	1.8%	90-100	160.6	1.9%	0-20	605.8	7.2%
10-20	455.1	5.4%	100-110	47.4	0.6%	0-30	1358	16.2%
20-30	752.5	9.0%	110-120	5.8	0.1%	0-40	2379	28.4%
30-40	1020	12.2%	120-130	2.2	0.0%	0-60	5038	60.1%
40-50	1244	14.8%	130-140	1.9	0.0%	0-80	7692	91.7%
50-60	1415	16.9%	140-150	1.1	0.0%	10-90	8017	95.6%
60-70	1495	17.8%	150-160	0.4	0.0%	20-50	3017	36.0%
70-80	1158	13.8%	160-170	0.0	0.0%	40-90	5789	69.0%
80-90	475.8	5.7%	170-180	0.0	0.0%	60-90	3129	37.3%
0-90	8168	97.4%	90-180	219.6	2.6%	0-180	8387	100.0%

Circle of Light Plot			
Height(ft)	Illuminance at Nadir (fc)	Ground-level distance to half-of-nadir illuminance (ft)	
		0-180 deg	90-270 deg
6.0	43.5	9.49	9.49
8.0	24.5	12.65	12.65
10.0	15.7	15.81	15.81
12.0	10.9	18.97	18.97
14.0	8.0	22.14	22.14
16.0	6.1	25.30	25.30